


■ Model Designation

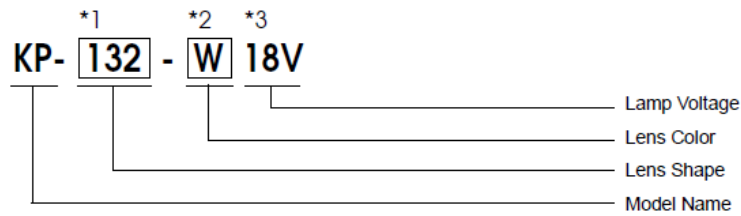

***1**

Code	Mounting Hole ϕ	Lens Shape
132	ϕ 16.5	Round
142A		Round protrusion
142F		Round flat protrusion
142F₂		Round flat
164D	ϕ 11.5	Diamond-shaped
164F		Round flat
164FL		Round flat
166B	ϕ 8.5	Round
166F		Round flat

***2**

Code	Lighting Color
W	Milky white
R	Red
G	Green
O	Orange

***3**

Model	Lamp Voltage
132	6.3V, 18V, 24V, 28V, 30V, 48V
142	6.3V, 18V, 24V, 28V, 30V, 48V
164	6.3V, 12V, 18V, 24V, 28V
166	6.3V, 12V, 18V, 24V, 28V

■ Ratings

Model	KP-132	KP-142	KP-164	KP-166
Item				
Matching Lamp	T-10 28L 2W or less, E-10 base	T-10 28L 2W or less, E-10 base	T-5 0.6W or less Stepped base	T-4, 2 0.6W or less Bi-pin base
Bulb Voltage	48V AC/DC or less		28V AC/DC or less	
LED Lamp	–	LE-10B LE-10D	LE-5A	LE-4.2A
LED Lamp Voltage	–	15V DC 24V DC	18V AC/DC 24V AC/DC	12V DC 24V DC