


Forma costruttiva - Mounting position IM B14, IM B14R

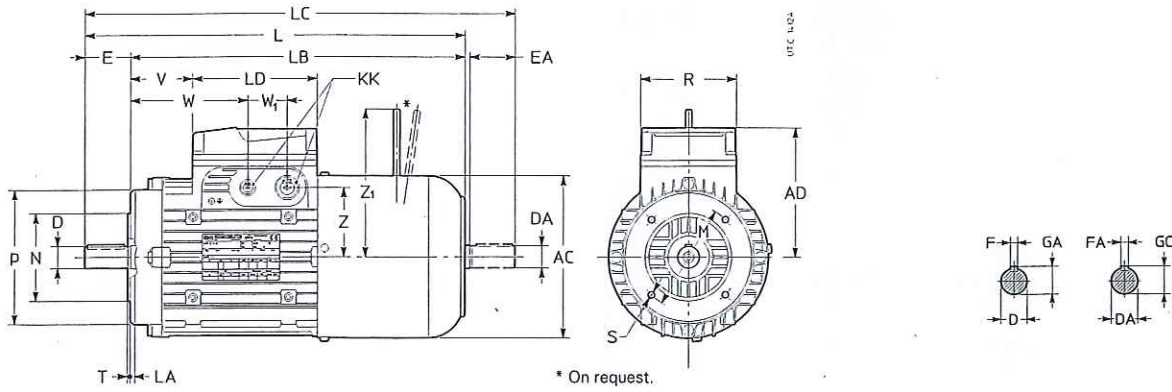

* A richiesta.

* On request.

Grand. motore Motor size	AC	AD	L	LB	LC	LD	KK	R	V	W	W ₁	Z	Z ₁	Estremità d'albero - Shaft end				Flangia - Flange									
														D	DA	1)	E	F	GA	GC	M	N	P	LA	S	T	
	∅						2)							∅	∅	h9	∅	∅	∅	∅	∅	∅	∅				
63	B14	123	95	267	244	295	103	4xM16	86	29	69	36	45	116	11	j6	M4	23	4	12,5	75	60	j6	90	8	M5	2,5
71	B14R	138	112	301	278	330		2xM16		47	87		62	125	14	j6	M5	30	5	16	85	70	j6	105	8	M6	2,5
	B14			308		344		+ 2xM20																			
80	B14R	156	121	332	302	369				59	99		71	134	19	j6	M6	40	6	21,5	100	80	j6	120	8	M6	3
	B14			342		389																					
90 S ⁶⁾	B14	176	141	386	336	443	136	2xM16	106	39	99	43	75		24	j6	M8	50	8	27	115	95	j6	140	10	M8	
								+ 2xM25					160 ³⁾														
90 L	B14			416	366	473				69	129																
100	B14	194	151	465	405	533				82	142		86		28	j6	M10	60	8	31	130	110	j6	160	10	M8	3,5
112	B14	218	163	495	435	564				100	160		98	198 ³⁾													
132 S, M ⁷⁾	B14	257	194	573	493	662	190	2xM16	148	78	166	55	109	203 ³⁾	38	k6	M12	80	10	41	165	130	j6	200	8	M10	
								+ 2xM32						226 ³⁾													
132 MA ⁸⁾ ... MC B14				633	553	722				138	226																

1) Foro filettato in testa.
 2) Predisposizione per accesso cavi su entrambi i lati (due fratture prestabilite per ogni lato);
 3) Quota valida per accoppiamento motore-freno 90-BF05 e 112-BF06S, 132-BF06 e 160-BF07; con il freno della grand. inferiore ved. quota Z₁ della grand. motore inferiore.
 6) Per motore HB3F 90S2 e HB3F 90S 4 quote come grand. motore 90L.
 7) Per motore HB3F 132SB 2, HB3F 132SC 2 e HB3F 132S 4 quote come grand. motore 132 MA ... MC.
 8) Per motore HBF 132MA 2 quote come grand. motore 132S, M.

1) Tapped butt-end hole.
 2) Prearranged cable entry knockout openings on both sides (two openings on each side);
 3) Dimension valid for motor-brake pairing 90-BF05 and 112-BF06S, 132-BF06 and 160-BF07; with brake of smaller size Z₁ of smaller motor size.
 6) For motors HB3F 90S2 and HB3F 90S 4 dimensions are the ones of sizes 90L.
 7) For motors HB3F 132SB 2, HB3F 132SC 2 and HB3F 132S 4 dimensions are the ones of sizes 132 MA ... MC.
 8) For motor HBF 132MA 2 dimensions are the ones of size 132S, M.