



**Messkabel** Bez.: X-KD6/A-FL-20m/PURS  
**Measuring cable type:** X-KD6/A-FSE-20m/PURS

**Art. Nr.: 10438**  
**Art. No.: 10438**

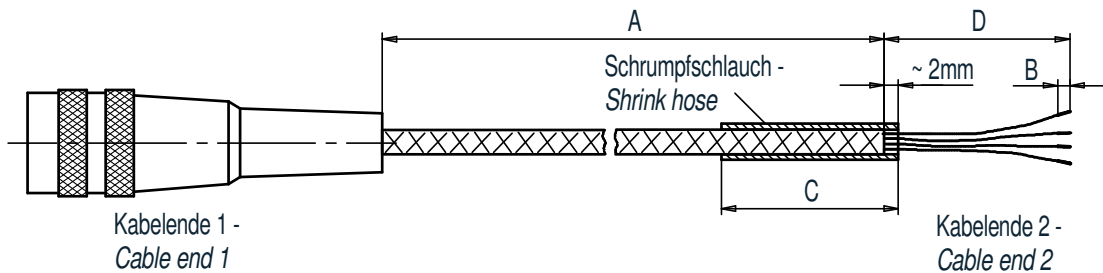

Verwendet für - Applied for	Sensor passive	
Kabel - Cable	Typ - Type	Unitronic-FD CPplus
	Abmessung - Dimensions	5 x 0,14 mm <sup>2</sup> PURS
	Art. Nr. - Art. No.	101546
Kabelende 1 - Cable end 1	Typ - Type	Kabeldose 6-polig Serie 723 - Cable connector female 6-pin, series 723
	Art. Nr. - Art. No.	44939
Kabelende 2 - Cable end 2	Typ - Type	Freie Litzen - Free soldered ends
Maße - Dimensions	Gesamtlänge - Total length	A = 20 m
	Adern verzinnt - Tinned wires	B = 3...4 mm
	Schrumpfschlauch - Shrink hose	C = 40...50 mm
	Abmantelung - Free wire	D = 40...50 mm

**Ansicht Lötseite (Buchse) - View soldered side (female)**

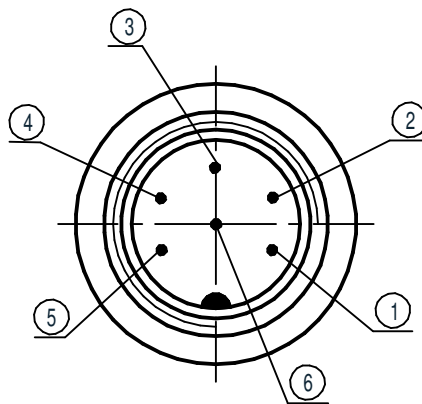

Kabelende 1 - Cable end 1 Anschluss - Connection	Kabeladern - Cable wires		Kabelende 2 - Cable end 2 Anschluss - Connection
	Funktion - Function	Aderfarbe - Conductor color	
1	Speisung (-) - Excitation (-)	grün - green	Freie Litzen - Free soldered ends
2	Speisung (+) - Excitation (+)	braun - brown	
3	Schirm - Shield	Geflecht - Netting	
4	Signal (+) - Signal (+)	gelb - yellow	
5	Signal (-) - Signal (-)	weiß - white	
6	Kontrollsignal - Control signal	grau - grey	